



ThermoWorks

# Smoke X4™


## 4-Channel Wireless BBQ Alarm Thermometer 6,562 Feet (1.24 Miles) Transmission Range

### Large Dashboard Display

The dashboard-like display shows the current temperature, high and low alarm settings, max/min readings, and alarm state for each channel—plus volume level and battery state, for the whole unit.

### Smoke X4 Receiver

Updates every 30 seconds with readings from all four channels. Also shows current temperatures, high/low alarm settings, and if the alarm is on or off.

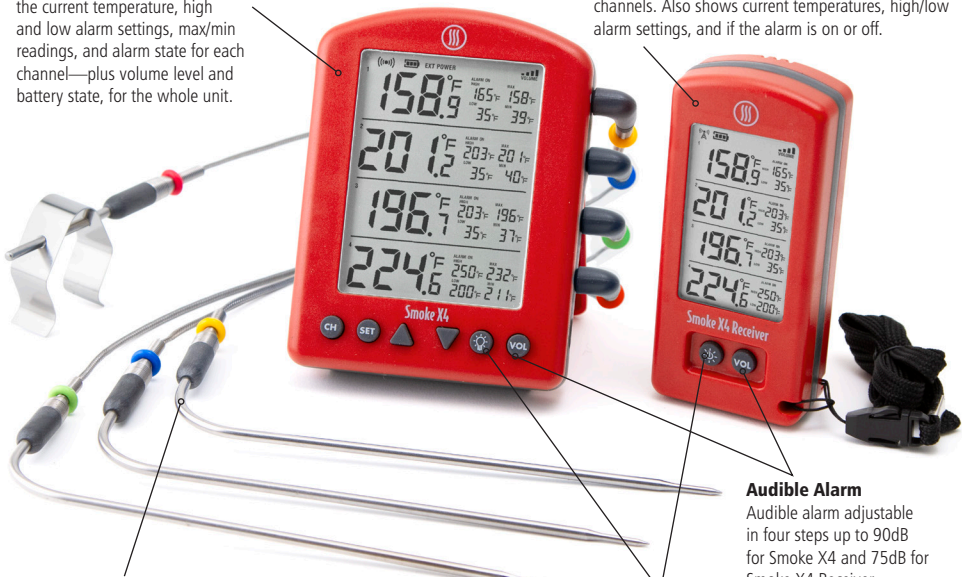

### Four Probes & Probe Identifiers

Includes three Pro-Series® High-Temp Cooking Probes and one Pro-Series High-Temp Air Probe. Works with all other Pro-Series probes. Probe identifiers allow you to quickly and easily identify which probe is plugged into each channel.

### Audible Alarm

Audible alarm adjustable in four steps up to 90dB for Smoke X4 and 75dB for Smoke X4 Receiver.

### Backlight

Turns on backlight for 20 seconds.



### Optional Billows™ Compatibility

Smoke X4 will allow you to control your smoker temperatures over an entire cook with Billows.



Everyone Else



ThermoWorks Smoke X

### Transmission Range

Range is an incredible 6,562 feet line-of-sight which gives you the freedom to keep track of your cook at a greater distance and signal strength to penetrate walls and obstacles.



### User Calibration

New from the factory, your Smoke X4 will read within  $\pm 1.8^\circ\text{F}$  even after changing probes so you should never really need to use the CAL function. However, you can fine-tune the calibration for accuracy better than  $\pm 1^\circ\text{F}$  on each channel.

### Wireless Pairing

From the factory, Smoke X4 and Smoke X4 Receiver are paired and ready to use. Access the sync mode to sync multiple Smoke X4 Receivers.